



 **HUFCOR[®]**

**WORLD LEADER IN
FLEXIBLE SPACE
MANAGEMENT**

**VINYL
COLOR
SELECTOR**

HUFCOR

COLOR SELECTOR

HIGHLAND Recommended for use on a tackable surface. The embossed surface helps to conceal pin holes. Pattern is a random match. Larger samples are available. Please contact your Hufcor Distributor.



231
White Rice

232
Greige

201
Off White

274
Dover (H)

236
Beach (H)



217
Flax

218
Coffee Cream

237
Cloud

225
Cement

238
Seafoam



227
Stone

228
Gulf

220
Incense

222
Rose Mauve

The Highland, Cairn, Stoneart, Mikado, Corfu, and Woodtone patterns and colors shown on this selector are included in the price of your partition. **There is no additional charge for the colors shown.**

COLOR SELECTOR

CAIRN Not recommended for use on a tackable surface. The tack holes may become visible over time. Pattern is a random match. Larger samples are available. Please contact your Hufcor Distributor. Additional Cairn colors are available from the vinyl manufacturer; however, there will be an increase in price for a color not shown on this selector.



239
Dover (C)

240
Creamsicle

241
Wheat

242
Beige

243
Adobe



244
Pearl

305
Grey

306
Grey Flannel

245
Nickel

246
Stone



247
Woodrose

248
Heather

249
Cinnamon

250
Baltic

251
Olive

The Highland, Cairn, Stoneart, Mikado, Corfu, and Woodtone patterns and colors shown on this selector are included in the price of your partition. **There is no additional charge for the colors shown.**

COLOUR SELECTOR

STONEART Not recommended for use on a tackable surface. The tack holes may become visible over time. Pattern is a random match. Larger samples are available. Please contact your Hufcor Distributor. Additional Stoneart colors are available from the vinyl manufacturer; however, there will be an increase in price for a color not shown on this selector.



269
Seashore


253
Dry Sage

270
Trail

255
Provence

256
Palomino

MIKADO Not recommended for use on a tackable surface. The tack holes may become visible over time. Pattern is a random match. Larger samples are available. Please contact your Hufcor Distributor. Additional Mikado colors are available from the vinyl manufacturer; however, there will be an increase in price for a color not shown on this selector.

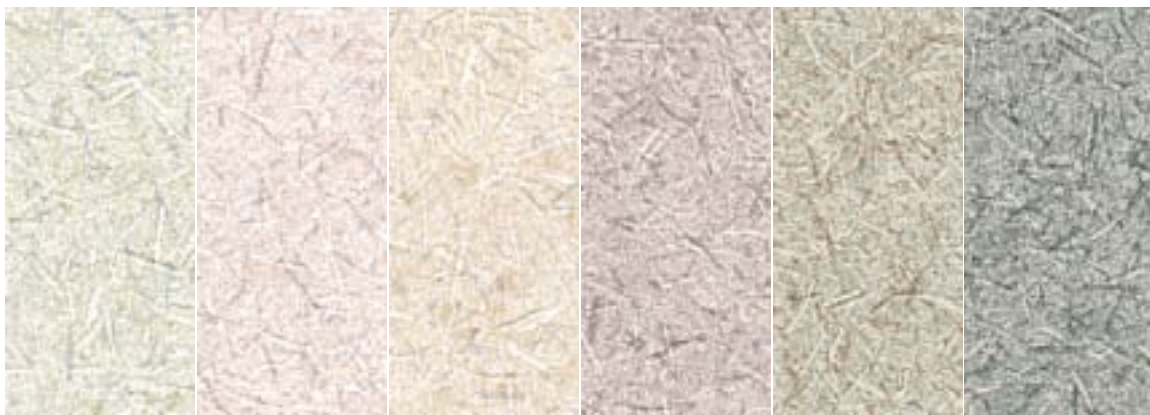

257
Ecrú

258
Pongee

259
Chardonay

260
Taupestone

261
Natural

262
Zephyr

CORFU Not recommended for use on a tackable surface. The tack holes may become visible over time. Pattern is a random match. Larger samples are available. Please contact your Hufcor Distributor. Additional Corfu colors are available from the vinyl manufacturer; however, there will be an increase in price for a color not shown on this selector.



263
Snowcap

264
Bisque

265
Fresco

268
Wheat

267
Lichen

WOODTONES



199
Cherry Oak

Not suitable as a tackable surface. Larger samples are available. Contact your Hufcor Distributor for information about additional colors or patterns. Minimum quantities and extended lead times may apply.

The Highland, Cairn, Stoneart, Mikado, Corfu, and Woodtone patterns and colors shown on this selector are included in the price of your partition. **There is no additional charge for the colors shown.**

HUFCOR

Vinyl Specifications

Patterns satisfactorily pass physical requirements for Type II as listed in G.S.A. Federal Specifications CCC-W-408A. (Federal Specification CCC-T-191 details test procedures required.)

FIRE RESISTANCE: Patterns meet Federal Specifications requirements of G.S.A. CCC-W408A and the CFFA Quality Standard for Vinyl Coated Fabric Wallcovering. This material has been tested for hazard classification in accordance with ASTM E-84 Tunnel Test.

Vinyl Wallcovering contains bacteria and mildew inhibitors intended to protect the product from microbiological, mildew growth and odors.

Vinyl remains unchanged after 200 hours UV exposure (CCC-408A).

In addition, vinyl wallcovering meets the following criteria:

Class A, Type II, Total Weight	Stoneart	Mikado	Corfu	Highland	Cairn
	to 20 oz.	to 20 oz.	to 20 oz.	to 20 oz.	to 20 oz.
Average Width	to 54" [1372mm]	to 54" [1372mm]	to 54" [1372mm]	to 53/54" [1346/1372mm]	to 53/54" [1346/1372mm]
ASTM E-84 Tunnel Test: Flame Spread*	10	5	5	10	10
Smoke Developed	10	5	5	5	5
Cadmium Free	X	X	X	X	X
Mercury Free	X	X	X	X	X
Mildew Resistant	X	X	X	X	X
CCFW-W-101	X	X	X	X	X
CCC-W408 A&C	X	X	X	X	X
City of New York MEA	313-89-M	166-91-M	166-91-M	307-89-M	307-89-M
NFPA 101-94 when tested by ASTM E84-91	X	X	X	X	X

*Note: The numerical flame spread rating and other test results referenced herein are not intended to reflect hazards presented by this or other material under actual fire conditions.

With the exception of Woodtones, all patterns are reversible with a random match.

Cleaning Instructions

These instructions will serve as a guide to normal cleaning maintenance.

Always use the mildest cleaning method first before using chemical cleaners.

Stains should be removed as quickly as possible to eliminate any possible reaction between the staining agent and the wallcovering. Time is especially important for removing materials containing colors or solvents, such as ballpoint ink, lipstick, oil and some foodstuffs. If soilants remain on the wallcovering too long, permanent discoloration may develop.

NOTE: When using rubbing alcohol, hydrogen peroxide, turpentine, household bleach or kerosene, first test the solution on some inconspicuous portion of the vinyl to be sure that there will not be any adverse effect on print, color or gloss.

When drying always use a blotting action rather than a rubbing motion.

NEVER MIX CLEANING AGENTS TOGETHER — VIOLENT REACTIONS MAY OCCUR

Vinyl wallcoverings should not be sprayed with wax or other protective coating. Such application would only tend to discolor the material, and in any case, would offer little protection.

Day-to-Day Soil

Ordinary dirt and smudges can be removed with a mild soap, warm water, and if necessary, a hard bristle brush to remove dirt from the crevices of deeply textured patterns. Clean from bottom of wall upward. Rinse thoroughly with clean water from the top down using a sponge. Deeply embossed wallcoverings need extra attention in case suds or loosened dirt lodge in depressed surfaces. Dry vinyl with a soft, white, lint-free cloth or towel. For more difficult stains that are only surface deep, the use of a stronger detergent is recommended however, the manufacturer's instructions should be followed carefully.

Not recommended for cleaning are steel wool or powdered abrasives because they mar the surface leaving an unsightly appearance.

DO NOT use active solvent type cleaning preparations, such as nail polish remover, tar and bug remover, etc., because they remove print, and/or finish from the wallcovering.

Stains

Ballpoint Ink — Remove immediately using a cloth dampened in rubbing alcohol.

Chewing Gum, Grease — Scrape off as much as possible and go over lightly with cleaning naphtha to remove remainder. (Chewing gum will come off more easily if rubbed with an ice cube). Rinse with clear water.

Pencil, Crayon — Scrape off excess crayon and erase pencil marks. Clean remaining stains with rubbing alcohol.

Paint or Enamel — Remove immediately with sponge or cloth dampened with turpentine, kerosene, cleaning naphtha or water as directed by paint can label. Wash with mild soap and water. Rinse with clear water.

Lacquer, Shellac — Remove immediately with dry cloth, taking care not to spread stain. Clean quickly with rubbing alcohol or perchlorethylene (Technical Grade). Rinse with clear water.

Tar or Asphalt — Remove immediately using a cloth dampened with kerosene or cleaning naphtha.

Rub gently from outside edge of stain to center to prevent stain from spreading. Rinse with clear water.

Blood, Urine — Remove quickly using a strong soap solution.

The quality systems of the Hufcor U.S. manufacturing facilities have been registered to the ISO 9001 standards.



The world leader in operable wall innovationSM

P.O. Box 591 • 2101 Kennedy Road • Janesville, WI 53547
Toll-Free 800-542-2371 ext. 214 • Or Telephone 608-756-1241
FAX: 608-758-8253 • E-mail: info@hufcor.com
Web: www.hufcor.com